




N-SPEX TRUX STIX

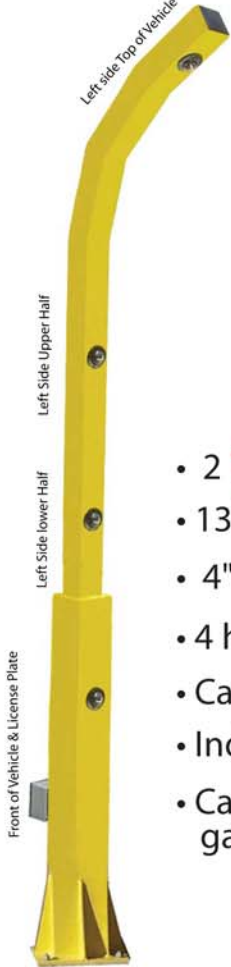



- 2 **TRUX STIX** with 4 cameras in each
- 13'6" tall
- 4" and 6" square aluminum, powder coated in bright yellow
- 4 holes in bottom plate to except concrete anchors (included)
- Camera is power wired in series down to double gang electrical box
- Individual coax runs for each camera terminated at double gang electrical box
- Camera wrench and lock screw, for each Aim & Lock camera, located in double gang electrical box

Specifications

Dimensions	13' 6" Tall x 6"(inch) Square
Surface Attachment	4 - 3/8" x 3" Concrete Anchors (included)

Cameras

Image sensor	1/2.9" Sony CMOS (XM-222)
Effective pixels	1944(H) x 1092(V)
H. Resolution	1080p
Synchronization system	Internal
Scanning system	Progressive
Video output	TVI / 1.0Vp-p Composite 75 Ohms
S/N ratio	More than 52dB (AGC Off)
Min. Illumination	0.1Lux
Shutter Speed	Auto (1/30sec - 1/60,000sec)
Gamma Correction	Standard $\gamma = 0.45$
White Balance	1,800 °K ~ 10,500 °k Auto
Gain Control	Standard : -6dB ~ 44.8dB Auto
Smear Effect	0.005%
Power source	12v DC
Power source	110mA
Lens	4mm
MTBF	80,000 Hours
Iris Control	Electronic
Operating temp./Humidity	14°F~ 120°F (Humidity : 0% RH ~ 90% RH)
IP Rating	66
Dimensions	3.10 Diameter x 2.25 Length

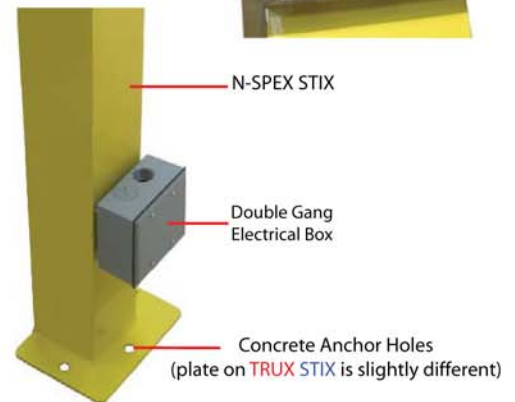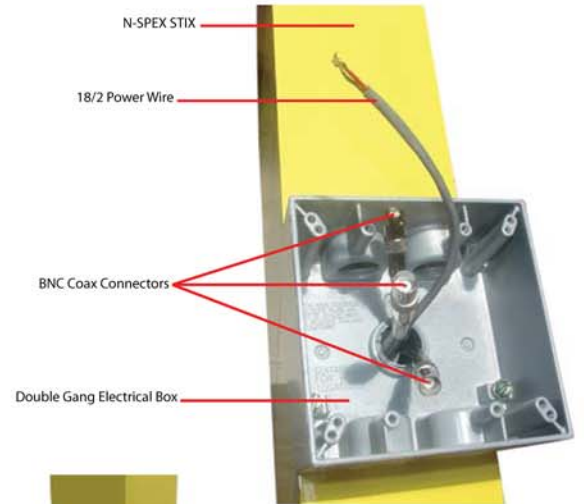

866-301-2288
201 N. ELM ST - KEMP TX 75143