



MEGASTIX SPECIFICATIONS

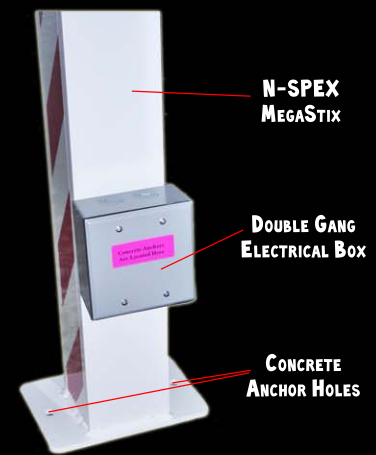

- **2 STIX WITH 3 CAMERAS IN EACH**
- **EACH LEG IS 9'** TALL WITH A FLAT MOUNTING PLATE ON THE VERY BOTTOM OF EACH LEG
- **4" SQUARE ALUMINUM, POWDER COATED BRIGHT WHITE WITH RED CAUTION TAPE STRIPING**
- **3 HOLES IN BOTTOM PLATE TO EXCEPT CONCRETE ANCHORS (INCLUDED)**
- INDIVIDUAL CAMERA POWER & DATA DOWN TO DOUBLE GANG ELECTRICAL BOX ON EACH LEG
- INDIVIDUAL COAX RUNS FOR EACH CAMERA TERMINATED AT DOUBLE GANG BOX
- CAMERA WRENCH AND LOCK SCREW, FOR EACH CAMERA LOCATED IN DOUBLE GANG BOX

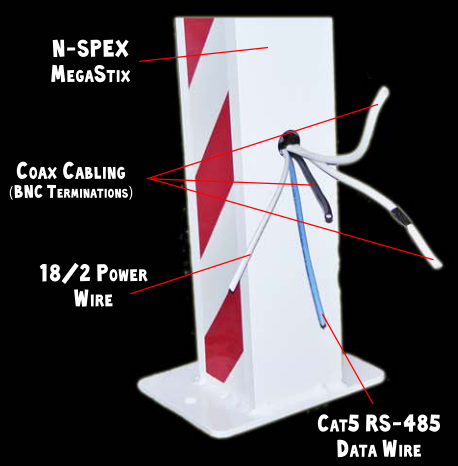

| | |
|--------------------------------|--|
| Resolution | HD-SDi (1080P, 720P) / 1000 TV LINE OVER |
| Sensor | 1/3 INCH SONY CMOS |
| Total Pixels | 2010(H) X 1108(V) =2,227,080 |
| Effective Pixels | 1944(H) X 1092(V)=2,122,648 |
| Scanning System | PROGRESSIVE |
| S/N (Y signal) | More than 52dB (AGC Off) |
| Video Output | (HD-SDi) /CVBS: 1.0Vp-p (75ohm) |
| Min. Illumination | 1Lux at F1.2 / 0.1 Lux (B/W) |
| White Balance | AUTO / AUTO EXT / PUSHING / MANUAL |
| Electronic shutter speed | AUTO / MANUAL (1/30sec ~ 1/30,000sec) |
| Brightness | ADJUSTABLE (0 ~ 20 STEP) |
| DNR | MIDDLE |
| Day & Night | AUTO |
| Language | ENGLISH |
| Operating Temperature/Humidity | -10°C ~ +50°C / 30%~80% RH |
| Storage Temperature/Humidity | -20°C ~ +60°C / 20%~90% RH |
| Power | DC12V Only |



1-866-301-CCTV

WWW.CARWASHCAMERAS.COM