

Any Weather / Long Distance / Plug-N-Play



OCCULUS

MOTO-DOME




4MP Infrared IP Camera with Motorized Lens

Features

- 820 Feet Video/Audio/Power over normal Cat5e (Exclusive Enviro Cams Extended Mode)
- Built-in Microphone
- IP67 Weatherproof – Indoor or Outdoor
- Wide Temperature Rating: -40° below to +140° F
- WDR (Sony's 120dB Wide Dynamic Range)
- Large 1/3" Progressive Scan CMOS Chip for better light gathering ability
- 4 Megapixel Resolution (2592x1520 max) – H.264/H.265/MJPEG options - Triple Stream capable
- Motorized 2.7mm to 12mm Varifocal Auto-Focus Megapixel Lens
- Optically Clear Glass front protecting the lens
- Up to 100' Infrared Illumination with Intensity-Controlled Smart IR's
- Narrow View Hallway Mode Menu option (9:16 ratio)
- Supports POE and/or 12V DC (will fail-over to 12V if POE is lost) w/ wide voltage range of + or - 25%
- Optional Onboard Micro SD Card for stand-alone or POE loss Recording – with Automatic Download to NVR when POE is restored
- 2D and 3D Digital Noise Reduction options

Dimensions

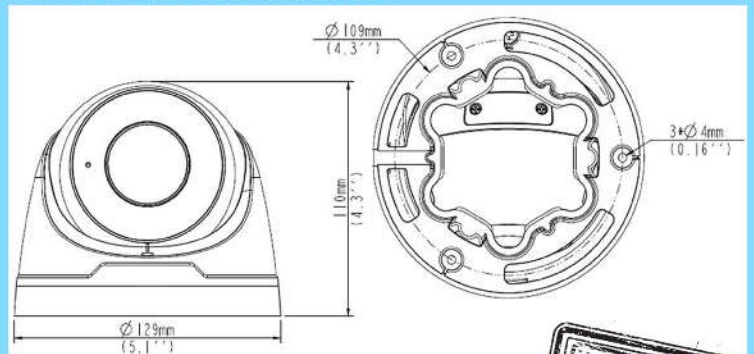

We guarantee at least 820' for Power & Video



201 N. Elm St.
Kemp, TX 75143

ENVIRO
cams

866-264-0041
sales@envirocams.com

Not Your Father's IP Cameras

Any Weather / Long Distance / Plug-N-Play

Occulus Specifications



Camera	
Sensor	1/3", 4megapixel, progressive scan, CMOS
Lens	2.7~12 mm@F1.4
Angle of view(H)	91.0°~27.0°
Zoom/Focus	Motor drive
Shutter	Auto/Manual, 1/6~1/100000 s
Min. Illumination	Colour: 0.02 Lux (F1.4, AGC ON) / 0 with IR on
IR Range	Up to 30m (98 ft) IR range
Day/Night	IR-cut filter with auto switch (ICR)
S/N	>52dB
WDR	120dB
Noise Reduction	2D/3D
Video	
Max. Resolution	2592x1520
Video Compression	H.265, H.264, MJPEG
Frame Rate	4MP (2592x1520): Max.20 fps; 4MP (2560x1440): Max.30 fps
Video Streaming	Triple
9:16 Corridor Format	Supported
Region Of Interest	Supported
Evaluative Metering	Supported
OSD	Up to 8 OSDs
Privacy Mask	Up to 8 areas


Smart	
Behavior Detection	Intrusion, crossing line, motion detection
Intelligent Identification	Face detection, Defocus, Scene Change
Statistical Analysis	People counting
Storage	
Edge Storage	Micro SD, up to 128 GB
Network	
Protocols	L2TP, IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, P
Compatible Integration	ONVIF,API
Interface	
Built-in Mic	Supported
Network	10M/100M Base-TX Ethernet
General	
Power	12 V DC, or PoE (IEEE802.3 af)
	Power consumption: Max 8.16W
Dimensions (Ø x H)	Ø129 x 110 mm (Ø5.08" x 4.3")
Weight	0.67 kg (1.48lb)
Working Environment	-40°C ~ +60°C (-40°F ~ 140°F), Humidity ≤ 95% R
Ingress Protection	IP67

Optional Mounts Available



Wall Mount

Pole Mounts Available For All Camera Mounts



Electronically Isolated Included

Unequaled Product Testing

- QUALITY
- RELIABILITY
- DISTANCE
- ENVIRONMENT

Customer Focused, Quality Driven!!



Dealer Info



201 N. Elm St.
Kemp, TX 75143



866-264-0041
sales@envirocams.com

Not Your Father's IP Cameras