


# MEGASTIX IP SPECIFICATIONS



- 2 STIX WITH 3 CAMERAS PER LEG
- EACH LEG IS 9' TALL WITH A FLAT MOUNTING PLATE ON THE VERY BOTTOM OF EACH LEG
- 4" SQUARE ALUMINUM, POWDER COATED BRIGHT WHITE WITH RED CAUTION TAPE STRIPING
- 3 HOLES IN BOTTOM PLATE TO EXCEPT CONCRETE ANCHORS (INCLUDED)
- INDIVIDUAL CAT5 RUNS FOR EACH CAMERA TERMINATED AT TRIPLE GANG BOX WITH WATERPROOF CONNECTORS PROVIDED
- CAMERA WRENCH LOCATED IN TRIPLE GANG BOX

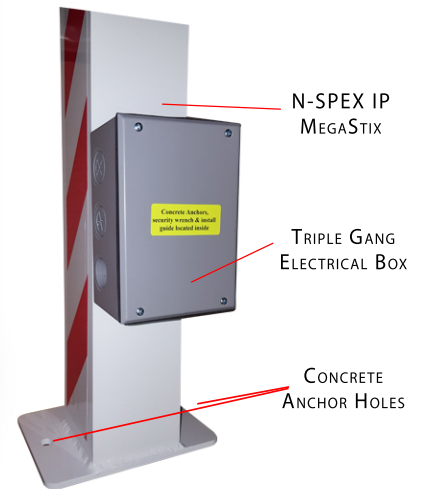

## Mega Stix IP Cameras

Sensor	1/3", 4 megapixel, progressive scan CMOS	
Lens	2.8 mm@F2.0	
Iris	Auto/Manual, F2.0	
Shutter	Auto/Manual, 1/6s ~ 1/100000s	
Min. Illumination	Colour: 0.02 Lux (F1.6, AGC ON) / 0 with IR on	
Day/Night	IR-cut filter with auto switch (ICR)	
S/N	>55dB	
WDR	Optical WDR (up to 120 dB)	
Max. Resolution	2592x1520	
Video Compression	H.265, H.264, MJPEG	
Frame Rate	4MP (2592x1520): Max. 20 fps;	4MP (2560x1440): Max. 25 fps
Privacy Mask	Up to 8 areas	
Protocols	L2TP, IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SIP, 802.1x	
Compatible Integrator	ONVIF,API	
Network	10M/100M Base-TX Ethernet	
Power	12 V DC, or PoE (IEEE802.3 af) Power consumption: Max 5.5W	
Dimensions (Ø x H)	4.28"x3.2"	
Weight	115lbs fully crated	

