

Any Weather / Long Distance / Plug-N-Play

Night Chaser 44

Top Mount PTZ




2MP IR IP PTZ Camera with 44x Motorized Lens

Features

- 820 Feet Video/Audio over normal Cat5e (Exclusive Enviro Cams Extended Mode)
- Full 360° Pan, auto reversing Tilt, motorized 44x Zoom and 256 presets savable
- IP66 Weatherproof – Outdoor
- Wide Temperature Rating: -35° below to +149° F
- WDR (Sony's 120dB Wide Dynamic Range)
- Large 1/2.8" Progressive Scan CMOS Chip for better light gathering ability
- 2 Megapixel Resolution (1920x1080 max) – H.264/H.265/MJPEG options - Triple Stream capable
- Motorized 5-220mm Varifocal Auto-Focus 44x Optical Megapixel Zoom Lens
- 6 sequences with up to 18 presets
- Infrared illumination distance up to 240ft
- High Strength Aluminum PTZ case used so it can withstand harsher environments.
- 12V DC 3amp power supply provided with every camera
- Made specifically for Top Mounting on vehicles or any horizontal surface.

Dimensions

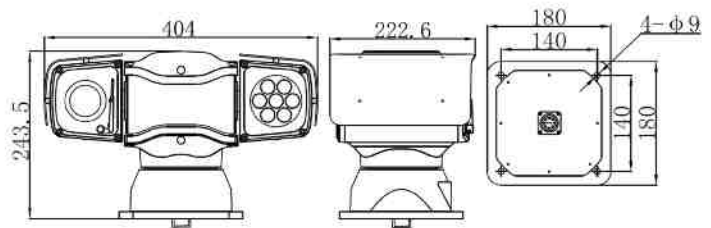

We guarantee at least 820' for Video & Audio



201 N. Elm St.
Kemp, TX 75143

ENVIRO
cams

866-264-0041
sales@envirocams.com

Not Your Father's IP Cameras


Night Chaser 44 Specifications



Camera	
Sensor	1/2.8", 2megapixel, progressive scan, CMOS
Lens	5 ~ 220mm (44x optical zoom)
Angle of View (H)	56.7° (wide) ~ 3.07° (tele)
Iris	Auto/Manual; F1.6
Shutter	Auto/Manual, 1/6s ~ 1/100000s
Min. Illumination	Colour: 0.002 Lux (F1.6 AGC ON) / 0.0002 Lux with IR
Day/Night	IR-cut filter with auto switch (ICR)
Infrared Distance	60-80m
White balance	Auto / Manual / ATW / Indoor / Outdoor
AGC	Auto / Manual
S/N	>50dB
WDR	120 dB

Video	
Max. Resolution	1920x1080
Video Compression	H.265, H.264, MJPEG
Frame Rate	1080P (1920x1080):Max.60 fps; 720P (1280x720):Max.30 fps; D1 (720x576):Max.55 fps
Video Output	BNC / RJ45
Video Streaming	Triple
OSD	Supported
Digital Zoom	Supported

Network	
Protocols	Pelco P & Pelco D with self adaptive baud rate of 2400bps, 4800bps, 9600bps or 19200bps
Compatible Integration	ONVIF,API

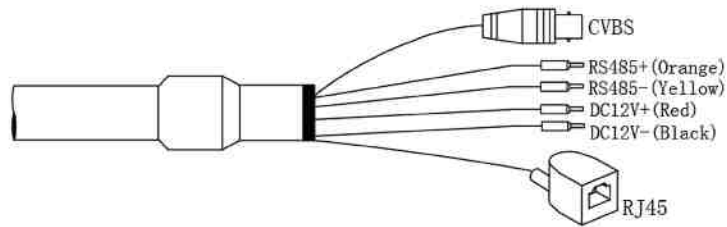

Structure	
Pan Range	360° endless
Pan Speed	0.5°/s ~ 60°/s - Preset speed: 100°/s
Tilt Range	-90° ~ 90° (auto reverse)
Tilt Speed	0.5°/s~40°/s - Preset speed: 60°/s
Number of Presets	256
Patrol	6 patrols with up to 18 presents each
Pattern	Patterns with total recording time of 10 minutes
Home Position	Supported

General	
Power **	12V DC 3A Power consumption: Max 40W
Dimensions (Ø x H)	16"x8.7"x9.6"
Weight	15.4lb
Working Environment	-35°C ~ +65°C (-31°F ~ 149°F), Humidity ≤ 95% RH(non-condensing)
IR	Built-in Infrared Illumination
Ingress Protection	IP66

** Supplied 12V DC power supply recommended and must be powered within a couple hundred feet using this DC voltage**

Unequaled Product Testing

- QUALITY
- RELIABILITY
- DISTANCE
- ENVIRONMENT

Customer Focused, Quality Driven!!



Dealer Info



201 N. Elm St.
Kemp, TX 75143



866-264-0041
sales@envirocams.com