

Ex Proof Mini


BULLET

2MP Explosion Proof Infrared IP Camera

Features

- 320 Feet Video/Audio/Power over normal Cat5e or Cat6 cabling
- IP66 Weatherproof – Indoor or Outdoor
- Wide Temperature Rating: -40° below to +140° F
- Day Night IR-CUT auto switch
- 1/2.7" 2.0 megapixel, progressive scan, CMOS
- 2 Megapixel Resolution (1920x1080 max) – H.264/H.265/MJPEG options
- 4mm Fixed Megapixel Lens
- Optically Clear Glass front protecting the lens
- Up to 100' Infrared Illumination with Intensity-Controlled Smart IR's
- Apply to explosive gas and combustible dust environment
- Housing and bracket made from 304 stainless steel
- Special Anti-shock Engineering Technology
- Supports standard 48V POE power
- 2D and 3D Digital Noise Reduction options
- ATEX Certified
- Small volume, light weight, is specifically designed to meet the transport of dangerous goods, blast testing, and other volatile environments.

Dimensions

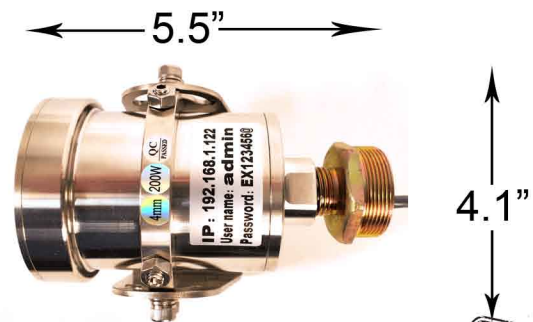


201 N. Elm St.
Kemp, TX 75143

ENVIRO
cams

866-264-0041
sales@envirocams.com

Not Your Father's IP Cameras

Ex Proof Mini Specifications



Camera	
Sensor	1/2.7", 2 megapixel scan CMOS
Lens	4mm fixed lens
Certificates	ATEX Explosion Proof
CPU	TI-DSP
Min. Illumination	Color 0.1Lux@F1.2, BW0.01 Lux@F1.2
IR Range	100 ft IR Range
IR Wavelength	850nm
Day/Night	IR-cut filter with auto switch (ICR)
IR Switch	IR Lamp Auto-Open when <0 Lux
S/N	>52db
Noise Reduction	2D/3D-DNR
Video	
Max Resolution	1920x1080
Video Compression	H.265, H.264, MJPEG
Frame Rate	1080P (1920x1080): Max 25fps, 720P(1280x720): Max 25 fps
Image Setting	Rotate mode, Saturation, Brightness, Contrast adjustable by client software web browser
H.264 Encoding Type	Base Line Profile / Main Profile
Compression Output Rate	32 Kbps-8Mbps
Video Streaming	Main and Sub

Network	
Protocols	RTSP/FTP/PPPOE/DHCP/DDNS/NTP/Upnp
Compatible Integration	ONVIF, PSIA, CGI, ISAPI, GB28181
General	
Material	304 Stainless Steel
Power	48V PoE or 12VDC external Power consumption: Max 17.23W
Dimensions	5.5"x3.6"x4.1"
Weight	2.6lb
Working Environment	*-40°C ~ +60°C (-40°F ~ 140°F), Humidity <95% RH(non-condensing)
Ingress Protection	IP66
Compliance	NDA Compliant

Unequaled Product Testing



QUALITY



RELIABILITY



DISTANCE



ENVIRONMENT

Customer Focused, Quality Driven!!



Dealer Info

201 N. Elm St.
Kemp, TX 75143

ENVIRO
cams

866-264-0041
sales@envirocams.com



Not Your Father's IP Cameras