



Top Mast 30

PTZ-DOME




2MP Starlight IP PTZ Camera with 30x Motorized Lens

Features

- 820 Feet Video/Audio over normal Cat5e (Exclusive Enviro Cams Extended Mode)
- Full 360° Pan, auto reversing Tilt, motorized 30x Zoom and 255 presets savable
- IP66 Weatherproof – Outdoor
- Wide Temperature Rating: -4° below to +149° F
- WDR (Sony's 120dB Wide Dynamic Range)
- Large 1/2.8" Progressive Scan CMOS Chip for better light gathering ability
- 2 Megapixel Resolution (1920x1080 max) – H.264/H.265/MJPEG options - Triple Stream capable
- Motorized 4.5-135mm Varifocal Auto-Focus 30x Optical Megapixel Zoom Lens
- 6 sequences with up to 18 presets
- Starlight Technology used for great "no light" illumination
- High Strength Aluminum PTZ case used so it can withstand harsher environments.
- 12V DC 2amp power supply provided with every camera
- Made specifically for Top Mounting on vehicles or any horizontal surface.

Dimensions

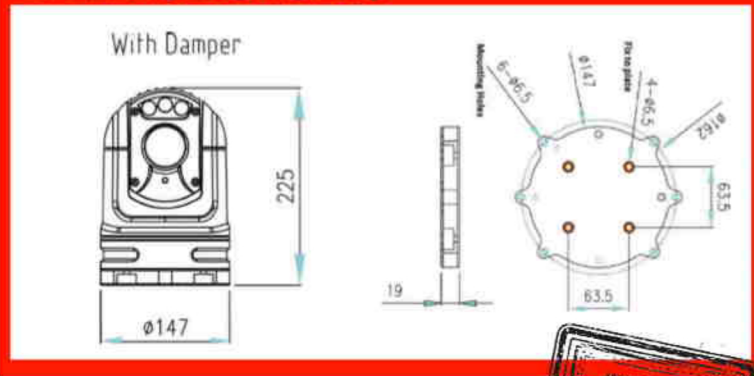

We guarantee at least 820' for Video & Audio



201 N. Elm St.
Kemp, TX 75143



866-264-0041
sales@envirocams.com

Not Your Father's IP Cameras

Top Mast 30 Specifications



| Camera | |
|------------------------|---|
| Sensor | 1/2.8", 2megapixel, progressive scan, CMOS |
| Lens | 4.5 ~ 135mm (30x optical zoom) |
| Angle of View (H) | 67.8° (wide) ~ 2.77° (tele) |
| Iris | Auto/Manual; F1.6 |
| Shutter | Auto/Manual, 1/1s ~ 1/30000s |
| Min. Illumination | Colour: 0.005 Lux (F1.6 AGC ON, 50IRE) / 0.0005 Lux with IR |
| Day/Night | IR-cut filter with auto switch (ICR) |
| Infrared Distance | 60m |
| White balance | Auto / Manual / ATW / Indoor / Outdoor |
| AGC | Auto / Manual |
| S/N | >50dB |
| WDR | 120 dB |
| Video | |
| Max. Resolution | 1920x1080 |
| Video Compression | H.265, H.264, MJPEG |
| Frame Rate | 1080P (1920x1080):Max.60 fps; 720P (1280x720):Max.30 fps; D1 (720x576):Max.55 fps |
| Video Output | BNC / RJ45 |
| Video Streaming | Triple |
| OSD | Supported |
| Digital Zoom | Supported |
| Network | |
| Protocols | Pelco P & Pelco D with self adaptive baud rate of 2400bps, 4800bps, 9600bps or 19200bps |
| Compatible Integration | ONVIF,API |

| Structure | |
|---------------------|---|
| Pan Range | 360° endless |
| Pan Speed | 0.5°/s ~ 80°/s - Preset speed: 100°/s |
| Tilt Range | -20° ~ 90° (auto reverse) |
| Tilt Speed | 0.5°/s~60°/s - Preset speed: 100°/s |
| Number of Presets | 255 |
| Patrol | 6 patrols with up to 18 presents each |
| Pattern | 4 patterns with total recording time of 10 minutes |
| Locking Position | Horizontal and Vertical planes locked when power is removed from camera |
| Home Position | Supported |
| General | |
| Power ** | 12V DC 2A Power consumption: Max 30W |
| Dimensions (Ø x H) | 8.9"x5.8" |
| Weight | 7.7lb |
| Working Environment | -20°C ~ +65°C (-4°F ~ 149°F), Humidity ≤ 95% RH(non-condensing) |
| IR | Built-in Infrared / Starlight Illumination |
| Ingress Protection | IP66 |

** Supplied 12V DC power supply recommended and must be powered within a couple hundred feet using this DC voltage**


Unequaled Product Testing

- QUALITY
- RELIABILITY
- DISTANCE
- ENVIRONMENT

Customer Focused, Quality Driven!!



Dealer Info

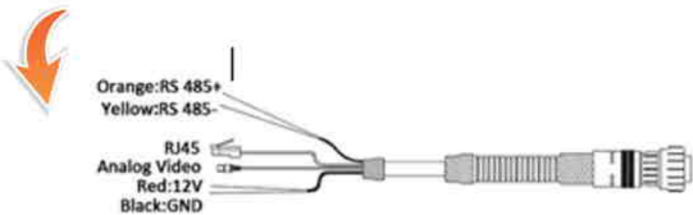

201 N. Elm St.
Kemp, TX 75143



866-264-0041
sales@envirocams.com

